

## Upright Cabinets

# TGN-1R-1S

 2/1 GN Upright Foodservice Refrigerator, 1 Full Solid Swing Door



Dimensions	
External Width (mm)	729
External Depth (mm)	858
External Height (mm)	2079
Exclusions	Depth does not include 46 mm for door handle or 13 mm for rear access panel.
Net Volume (Litres)	435
Gross Volume (Litres)	720
Supplied Shelves	3
Shelf Size (L x D mm)	530 x 650
Internal Net Height (mm)	1350
Unpackaged Weight (kg)	136
Packaged Weight (kg)	147
Packaged Dimensions (W x D x H mm)	1016 x 813 x 2134
Supplied with	Heavy duty lock-in-place ø 64 mm castors (83 mm height)

Build	
Door Description	1 Solid Swing Door
Door Opening	Right (standard) or Left Field Reversible
Exterior Construction	Stainless steel front, aluminium sides & rear
Interior Construction	Clear coated aluminium, stainless steel base
Air Intake Position	Front
Ventilation Position	Rear
Clearance Required	26 mm rear, zero sides
Cord Length (Meters)	2.74
Internal Lighting	LED
Standard w/ Locks	Standard

Technical	
Temperature Range	0.5 : 3.3°C
Refrigerant	R290
Voltage/Frequency/Phase	220-240V/50-60Hz/1
Amps	0.65
Watts	150
Climate Class	5
Operating Statement	Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C.
Test Standard	EN 16825
EEC	A
Energy Efficiency Index	24.8
Defrost Type	Auto
Energy Consumption (kWh/24h)	0.89
Energy Consumption (kWh/Annum)	328



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia


0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



# TGN-1R-1S

 2/1 GN Upright Foodservice Refrigerator, 1 Full Solid Swing Door

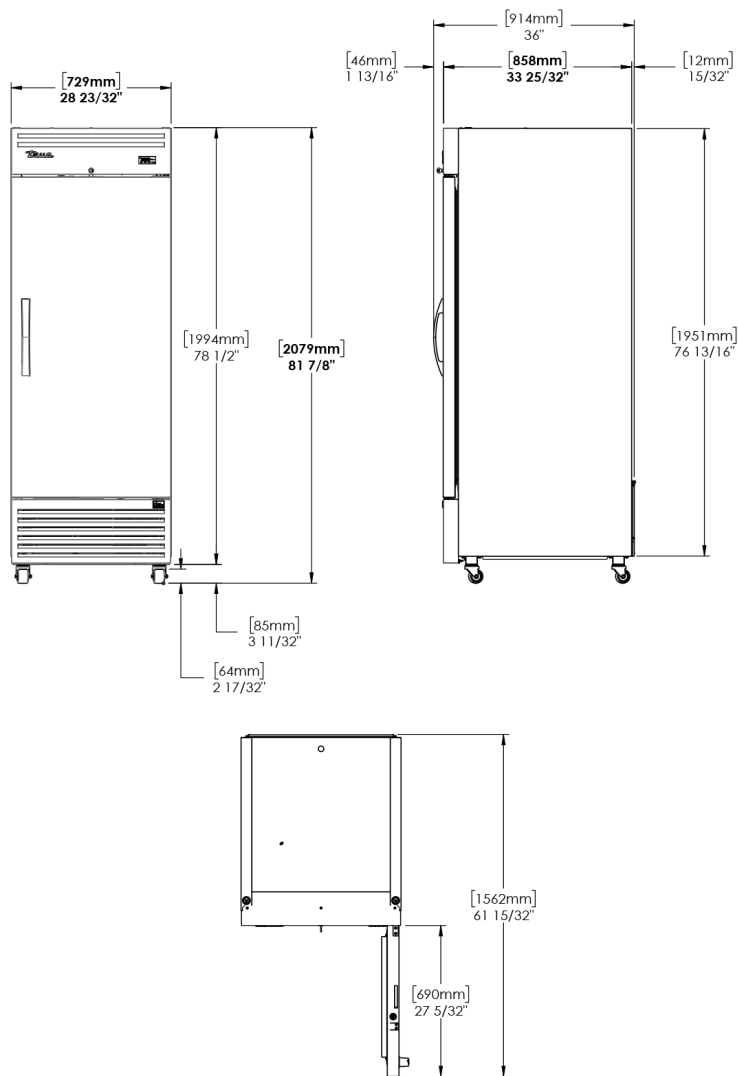

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
+41 61 563 07 05  
+61 2 9619 9999

TFIUK@truemfg.com  
TrueCHCustomerService@truemfg.com  
TrueRefAus@truemfg.com

