

TUC-67-HC

 Deep Undercounter Refrigerator, 2 Solid Swing Doors



| Dimensions | |
|------------------------------------|--|
| External Width (mm) | 1709 |
| External Depth (mm) | 818 |
| External Height (mm) | 839 |
| Exclusions | Depth does not include 26 mm for rear bumpers. |
| Net Volume (Litres) | 484 |
| Gross Volume (Litres) | 583 |
| Supplied Shelves | 4 |
| Shelf Size (L x D mm) | 601 x 712 |
| Internal Net Height (mm) | 580 |
| Unpackaged Weight (kg) | 164 |
| Packaged Weight (kg) | 175 |
| Packaged Dimensions (W x D x H mm) | 1880 x 966 x 1245 |
| Supplied with | Heavy duty lock-in-place ø 64 mm castors (83 mm height) (reduced height option available, totals 810 mm) |

| Build | |
|-----------------------|--|
| Door Description | 2 Solid Swing Doors |
| Exterior Construction | Stainless steel front & countertop, aluminium sides & rear |
| Interior Construction | Clear coated aluminium, stainless steel base |
| Air Intake Position | Front |
| Ventilation Position | Front |
| Clearance Required | Zero back and sides |
| Cord Length (Meters) | 2.13 |
| Standard w/ Locks | Not Standard (SPEC3 option) |

| Technical | |
|--------------------------------|--|
| Temperature Range | 0.5 : 3.3°C |
| Refrigerant | R290 |
| Voltage/Frequency/Phase | 220-240V/50-60Hz/1 |
| Amps | 1.3 |
| Watts | 299 |
| Climate Class | 5 |
| Operating Statement | Heavy Duty: This appliance is intended for use in ambient temperatures up to 40°C. |
| Test Standard | EN 16825 |
| EEC | A |
| Energy Efficiency Index | 24.1 |
| Defrost Type | Auto |
| Energy Consumption (kWh/24h) | 2 |
| Energy Consumption (kWh/Annum) | 729 |



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia



0800 783 2049
[+41 61 563 07 05](tel:+41615630705)
[+61 2 9619 9999](tel:+61296199999)

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com



TUC-67-HC

 Deep Undercounter Refrigerator, 2 Solid Swing Doors

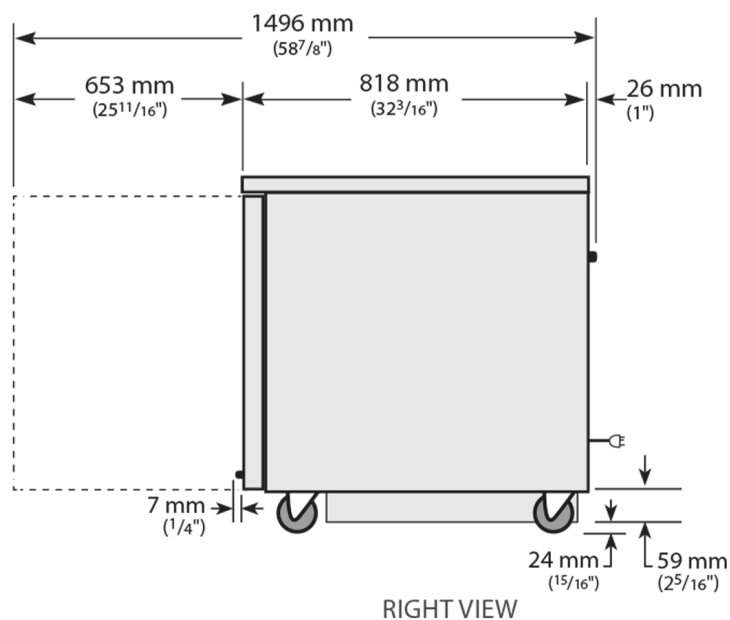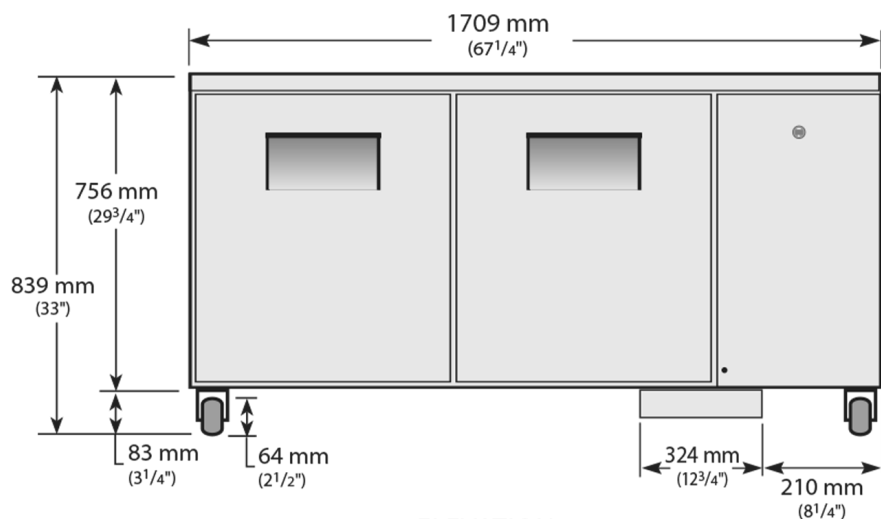

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland
EMEA
Australia

0800 783 2049
+41 61 563 07 05
+61 2 9619 9999

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

