

Glass Door Display

# GDM-43-HC~TSL01

 Upright Retail Merchandiser Refrigerator, 2 Full Glass Swing Doors



| Dimensions                         |  |
|------------------------------------|--|
| External Width (mm)                | 1197   |
| External Depth (mm)                | 759  |
| External Height (mm)               | 1998   |
| Exclusions                         | Depth does not include 42 mm for door handle or 13 mm for rear access panel. |
| Net Volume (Litres)                | 756  |
| Gross Volume (Litres)              | 1217   |
| Display Area (m <sup>2</sup> )     | 1.26   |
| Supplied Shelves                   | 8  |
| Shelf Size (L x D mm)              | 531 x 534  |
| Internal Net Height (mm)           | 1300   |
| Unpackaged Weight (kg)             | 239  |
| Packaged Weight (kg)               | 250  |
| Packaged Dimensions (W x D x H mm) | 1258 x 902 x 2134  |
| Supplied with                      | Levelling Screws. Optional castors sold separately.                          |

| Build                 |   |
|-----------------------|---|
| Door Description      | 2 Full Glass Swing Doors                        |
| Exterior Construction | Black powder coated Steel front, sides and rear |
| Interior Construction | White coated aluminium, stainless steel base    |
| Air Intake Position   | Front   |
| Ventilation Position  | Rear  |
| Clearance Required    | 26 mm rear, zero sides                          |
| Cord Length (Meters)  | 2.74  |
| Internal Lighting     | LED   |
| Standard w/ Locks     | Not Standard. Options available.                |

| Technical                      |   |
|--------------------------------|---|
| Temperature Range              | 0.5 : 3.3°C   |
| Refrigerant                    | R290  |
| Voltage/Frequency/Phase        | 220-240V/50-60Hz/1  |
| Amps                           | 2.2   |
| Watts                          | 506   |
| Temperature Class              | M1  |
| Operating Statement            | Tested at 25°C, 60% RH, per 'Refrigerators with a Direct Sales Function' for perishable food merchandising. |
| Test Standard                  | EN 23953  |
| EEC                            | B   |
| Energy Efficiency Index        | 15  |
| Defrost Type                   | Auto  |
| Energy Consumption (kWh/24h)   | 3.9   |
| Energy Consumption (kWh/Annum) | 1429  |



Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)


[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)



Glass Door Display

# GDM-43-HC~TSL01

Upright Retail Merchandiser Refrigerator, 2 Full Glass Swing Doors

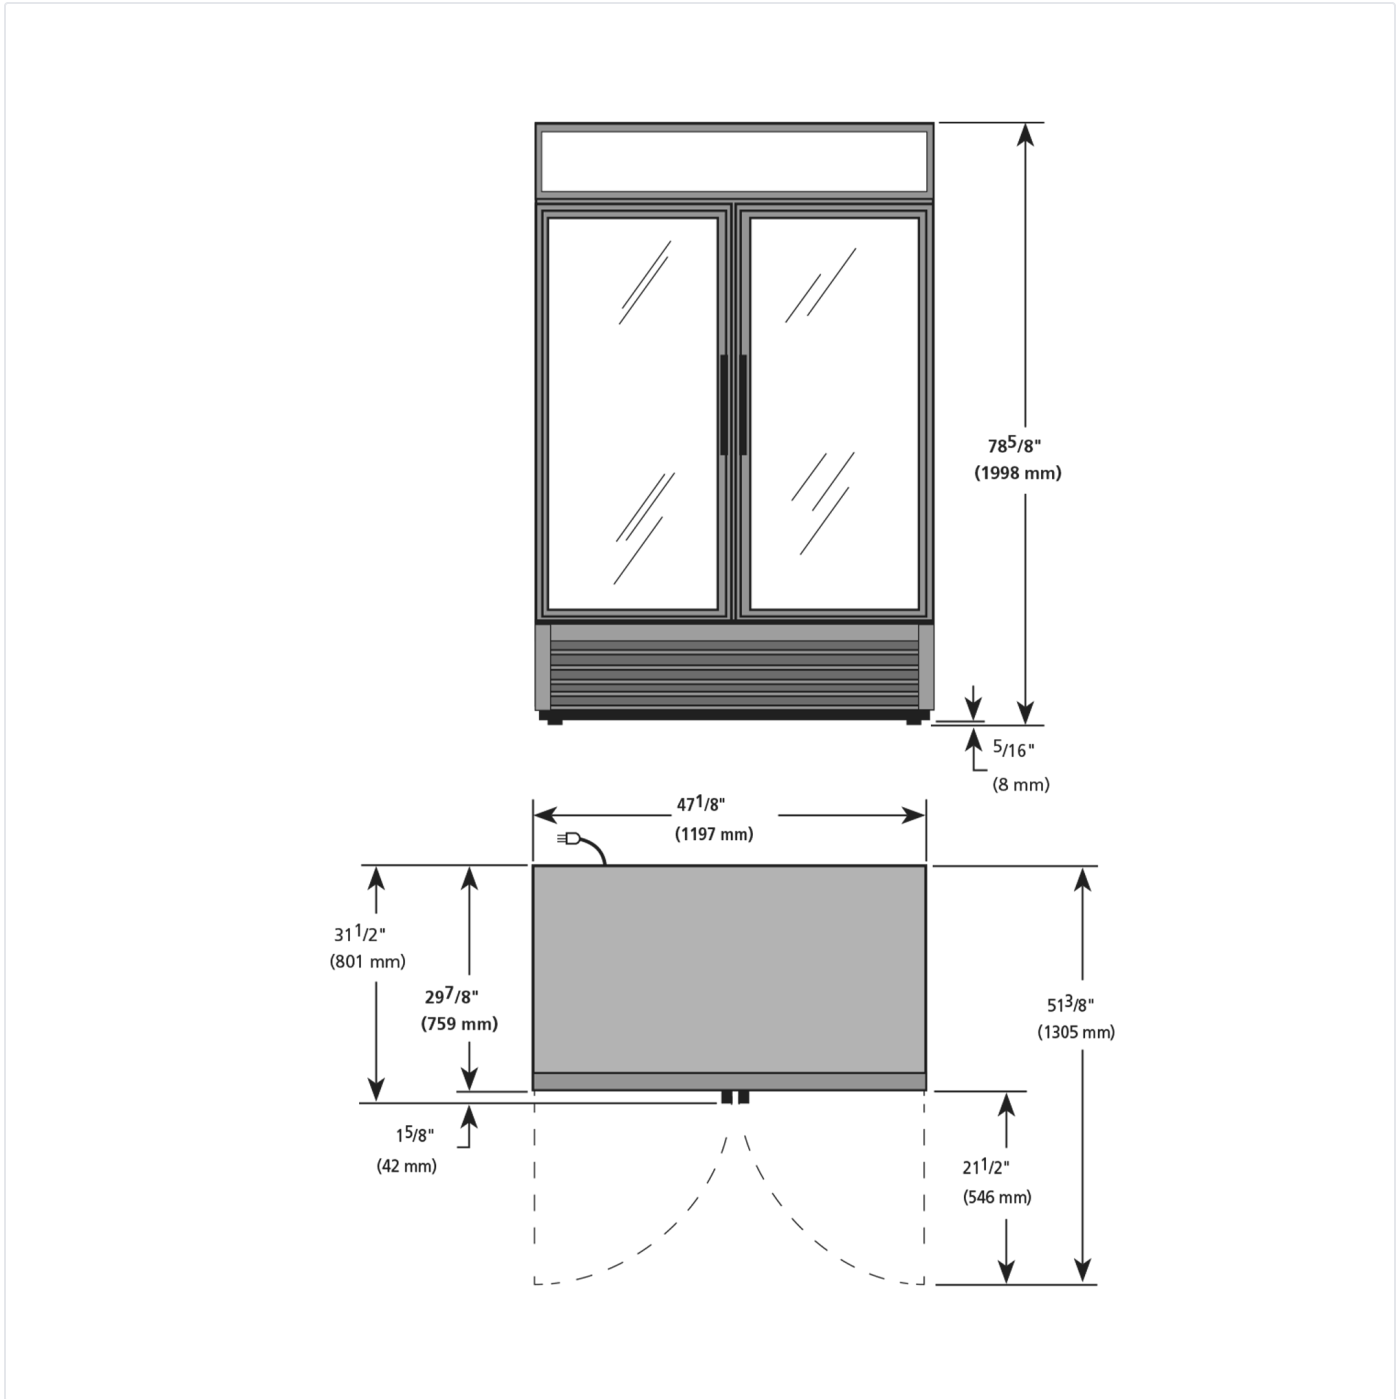

Specifications subject to change without notice.  
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland  
EMEA  
Australia

0800 783 2049  
[+41 61 563 07 05](tel:+41615630705)  
[+61 2 9619 9999](tel:+61296199999)

[TFIUK@truemfg.com](mailto:TFIUK@truemfg.com)  
[TrueCHCustomerService@truemfg.com](mailto:TrueCHCustomerService@truemfg.com)  
[TrueRefAus@truemfg.com](mailto:TrueRefAus@truemfg.com)

