FRPSvg 6501

Forced-air refrigerator GN 2/1

Performance

German Engineering

LIEBHERR

Freestanding

FRPSvg 6501

Forced-air refrigerator GN 2/1
Performance

LIEBHERR

German Engineering

Super Cool

Gross/net capacity	597/486 l
Ext. dimensions in mm (w/d/h)	697/867/2115
Int. dimensions in mm (w/d/h)	509/650/1512
Energy efficiency class	A [1]
Energy consumption in 365 days	302 kWh
Climate class (energy directive)	5
Temperature class (energy directive)	M1
Ambient temperature range	+10 °C to +40 °C [2]
Refrigerant	R 290
Noise output	60 dB(A)
Connection Rating	4.0 A
Frequency / voltage	50 Hz / 220-240 V~
Heat output	305
Cooling system	dynamisch
Defrosting	automatisch
Temperature range	-2 °C to +15 °C
Housing material/colour	Chrom-Nickel-Stahl (1.4301 / AISI 304)/Edelstahl
Door material / colour	Chrom-Nickel-Stahl (1.4301 / AISI 304) / Edelstahl
Liner Material	Chrom-Nickel-Stahl (1.4301 / AISI 304)
Type of Control	Monochrom-Display, Touch-Buttons
Temperature display	außen digital
Interior light	LED-Deckenbeleuchtung
Alarm in case of malfunction	optisch und akustisch
Connectivity type	SmartModule
Connectivity solution	Nachrüstbar
Interface	WLAN/LAN (optional)
Adjustable Shelving	3
Shelf material	Roste kunststoffbeschichtet
Shelf loading	60 kg
Height of adjustable legs	115–175
Handle	Griffleiste
Type of lock	mechanisch
Self-closing door	yes
Door hinges	rechts wechselbar
Gross/net weight	139/116.1 kg
EAN-Nr.	9005382248676

[1] Indicates the ambient temperature at which the device can be operated safely.

Features

Stainless steel interior and exterior

Hygiene is top priority in places where food is stored. With this in mind, the deep drawn Gastronorm 2/1 stainless steel inner liner is made from hygienic stainless steel and omits awkward-to-clean functional parts. The seamless stainless steel side panels of the outer housing, with insulation layer, are also especially easy to clean. Stainless steel fridges and freezers GN 2/1 are jet water resistant inside and out, in accordance with IPX5.



Extended temperature zone –2 °C/+15 °C

Liebherr refrigerators have an extended temperature range from –2 °C to +15 °C, so even meat stays fresh and tasty for longer.

LED ceiling lighting

Even in a dark environment, the LED ceiling lighting provides good illumination of the interior. Thanks to the optimum overview, the desired product is immediately at hand, which means that the door can be quickly closed and the interior temperature remains stable. This saves you unnecessarily searching for something – and above all saves energy costs.



Retrofittable WiFi/LAN interface

This is how easy it is to network a Liebherr: With the retrofittable WiFi and LAN interface, appliances can be effortlessly connected to external systems, such as SmartMonitoring from Liebherr. With the digital monitoring solution, the storage temperature is monitored and documented conveniently and securely via the subsequently set up interface.



Power failure info

If the power supply was interrupted due to a fault, the power failure information appears once the power is restored. This reports that the appliance was temporarily without power and the maximum temperature that was reached during this time. This allows you to assess whether a loss of quality is likely.

Clear appliance information

All of the information about the appliance should be there exactly when you need it. That's why every Liebherr has its serial and service number as well as the model designation on the display, where it can be easily read. Frustrated searches or even having to clear the interior out to be able to read the information are now a thing of the past.

The overview represents an excerpt of the most important appliance features. All other features of the appliance and further information are available at home.liebherr.com.

Freestanding FRPSvg 6501

Technical drawing

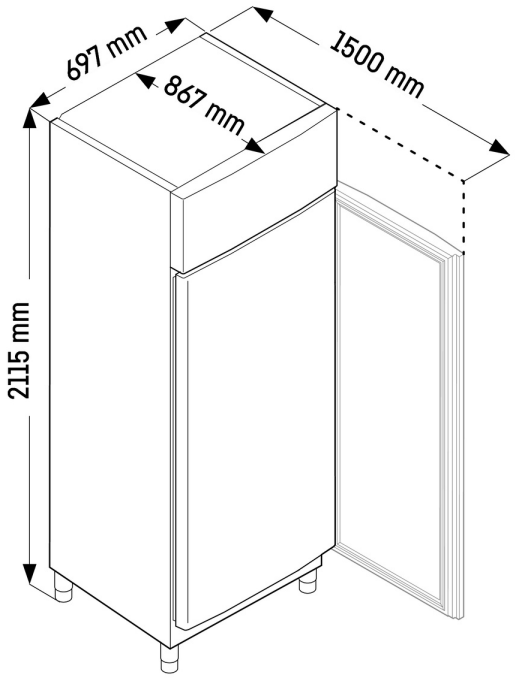

Products and their details are staged for advertising purposes. Whilst every effort is made to ensure all specifications and information in this flyer are accurate, Liebherr reserves the right to make changes without notification. Where actual appliance measurements, specifications, and ratings are crucial, we recommend that the actual appliance installation instructions that accompany each appliance be checked. Liebherr will not be liable for any damage. (16.01.2026)